


ET80-150E

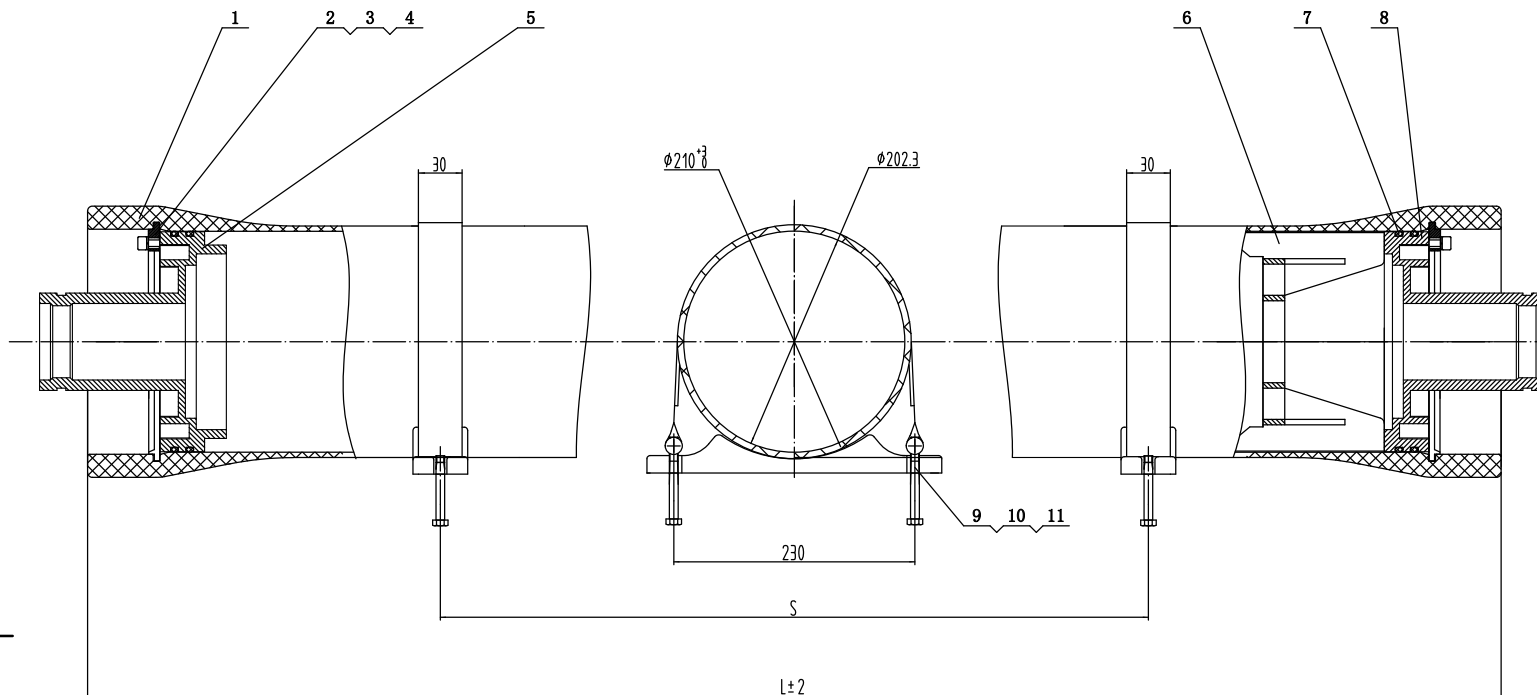

Note:

1. Design pressure: 1.0MPa(10KGS)
2. Design temperature: 150° F(66° C)
3. Minimum temperature: 14° F(-10° C)
4. Working medium: Water, PH 3-11
5. Please operate in accordance with User Guide
6. Flexible piping should be used on permeate connection to manifold

11	Saddle	ET80-150E-11	2	Rubber	
10	Strap Screw	ET80-150E-10	4	304SST	
9	Strap	ET80-150E-9	2	304SST-Rubber	
8	Outlet End Cap	ET80-150E-5.1	1	ABS	
7	O-Ring	ET80-150E-7	3	EPDM	190x5.3
6	Thrust Ring	ET80-150E-6	1	ABS	
5	Inlet End Cap	ET80-150E-5	1	ABS	
4	Locking Kit Segment	ET80-150E-4	6	304SST	
3	Spring Pad	ET80-150E-3	6	304SST	$\phi 8$
2	Locking Segment Screw	ET80-150E-2	6	304SST	M8x16
1	Pressure Shell	See SelectionTable	1	Epoxy FRP	White
Ref.	Description	Part Number	Qty.	Material	Remark

Ref.	Part Number	L (MM)	S (MM)	Approx assembly weight (KG)
20"	ET80-150E-20	792	500	20
40"	ET80-150E-40	1300	800	22
60"	ET80-150E-60	1808	1300	25.5

Harbin FirstLine Environment Technology Co., Ltd.

EuroTec

Design Date	Model	ET80-150E Cartridge Housing
Review Date	DRG	ET80-150E-00
Approval Date	Unit	mm
	REV.	2017