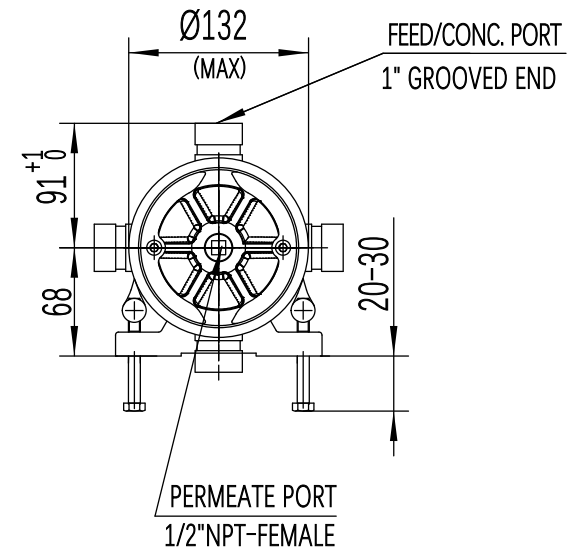


GENERAL NOTES:	
1.	DIMENSIONS IN MM.
2.	MAX. ANGULAR VARIATION BETWEEN ANY PORT ± 0.5 .
3.	DESIGN PRESSURE: 450PSI.
4.	DESIGN TEMPERATURE: Min.-7°C(20°F)-Max.49°C(120°F).
5.	FOR OTHER TEMPERATURES OUT OF THIS RANGE CONTACT FIRST LINE .
6.	CENTER VESSEL ON 2 OR 3 SUPPORTS AT SPAN"S": 2 SUPPORTS(FOR LENGTH 1-3), 3 SUPPORTS(FOR LENGTH 4-6) .
7.	FOR VESSEL INSTALLATION AND MAINTENANCE PLEASE REFER TO FIRST LINE USER'S MANUAL.
8.	FOR REFERENCE ONLY, NOT FOR CONSTRUCTION UNLESS CERTIFIED.

* Parts 15 and 16 are used for 4 to 6 elements vessel only

Ref.	Part Number	L (MM)	P (MM)	S (MM)	Approx Assembly Weight (KG)
1	F40450S-1	1152	996	600	10.6
2	F40450S-2	2168	2012	1200	15.3
3	F40450S-3	3184	3028	2200	20
4	F40450S-4	4280	4112	1600x2	24.7
5	F40450S-5	5296	5128	2300x2	29.4
6	F40450S-6	6312	6144	2700x2	34.1

Harbin First Line Environment Technology Co.,Ltd.

<i>First Line</i>	Design Date	Model F40-450S Pressure Vessel	
	Review Date	DRG F40-450S-00-01	
	Approval Date	Unit MM	REV. 2026